



CONDUIT HEAD GLANDS

Product


INSTALL STEPS

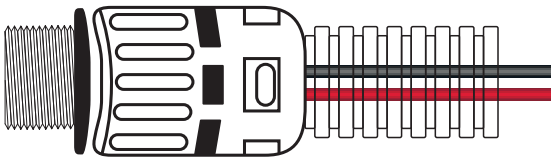


1. THREAD GLAND INTO ENCLOSURE OR USE LOCKING NUT



2. INSERT CABLES THROUGH GLAND & TIGHTEN

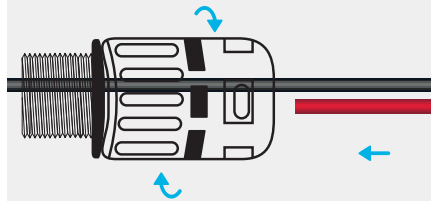

3. PUSH CONDUIT INTO CONDUIT HEAD

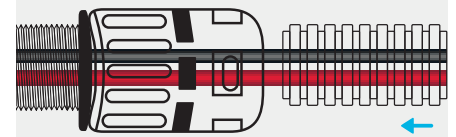

Note:

- Conduit cannot be released
- Do Not Glue